


Curved Blade Air Grille

Type ASS - A

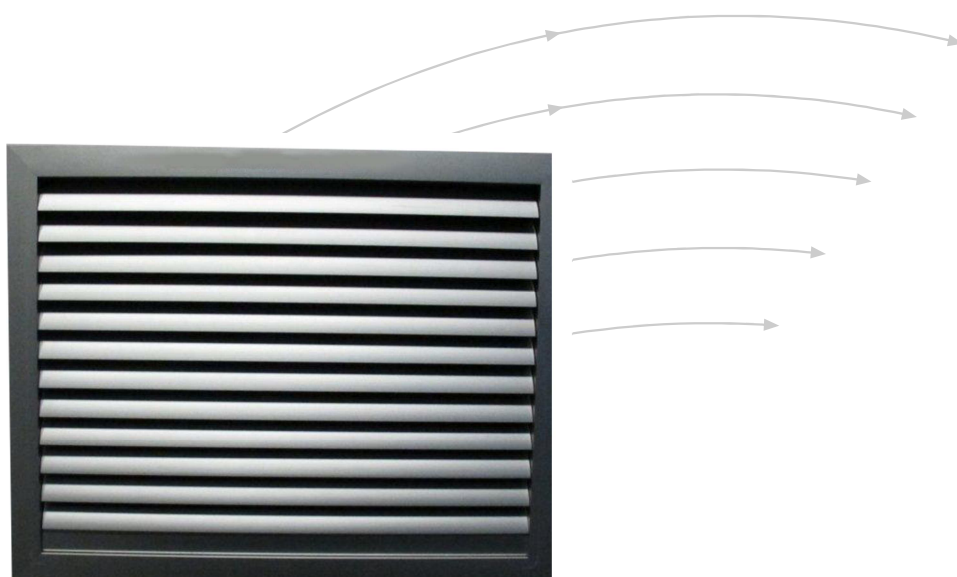

TROX[®] TECHNİK

TROX South Africa (Pty) Ltd.
10 Wigford Road
Masons Mill
Pietermaritzburg

Tel: +27 (0) 33 398 1006
Fax: +27 (0) 33 398 1001
Website: www.troxsa.co.za

Contents • Description


Description	2
Materials and Dimensions	2
Technical Data	3
Order Details	3

Description

The TROX ASS return air grille is constructed from aluminium sections, consisting of horizontal fixed curved blades. The option for a rear mounted OBD (opposed blade damper) is also available and supplied in a MATT black finish.

The grille is supplied with either a 28mm flange as standard or a 35mm flange as optional. Screw fixing is also available (punched and counter sunk).

Grille Dimensions

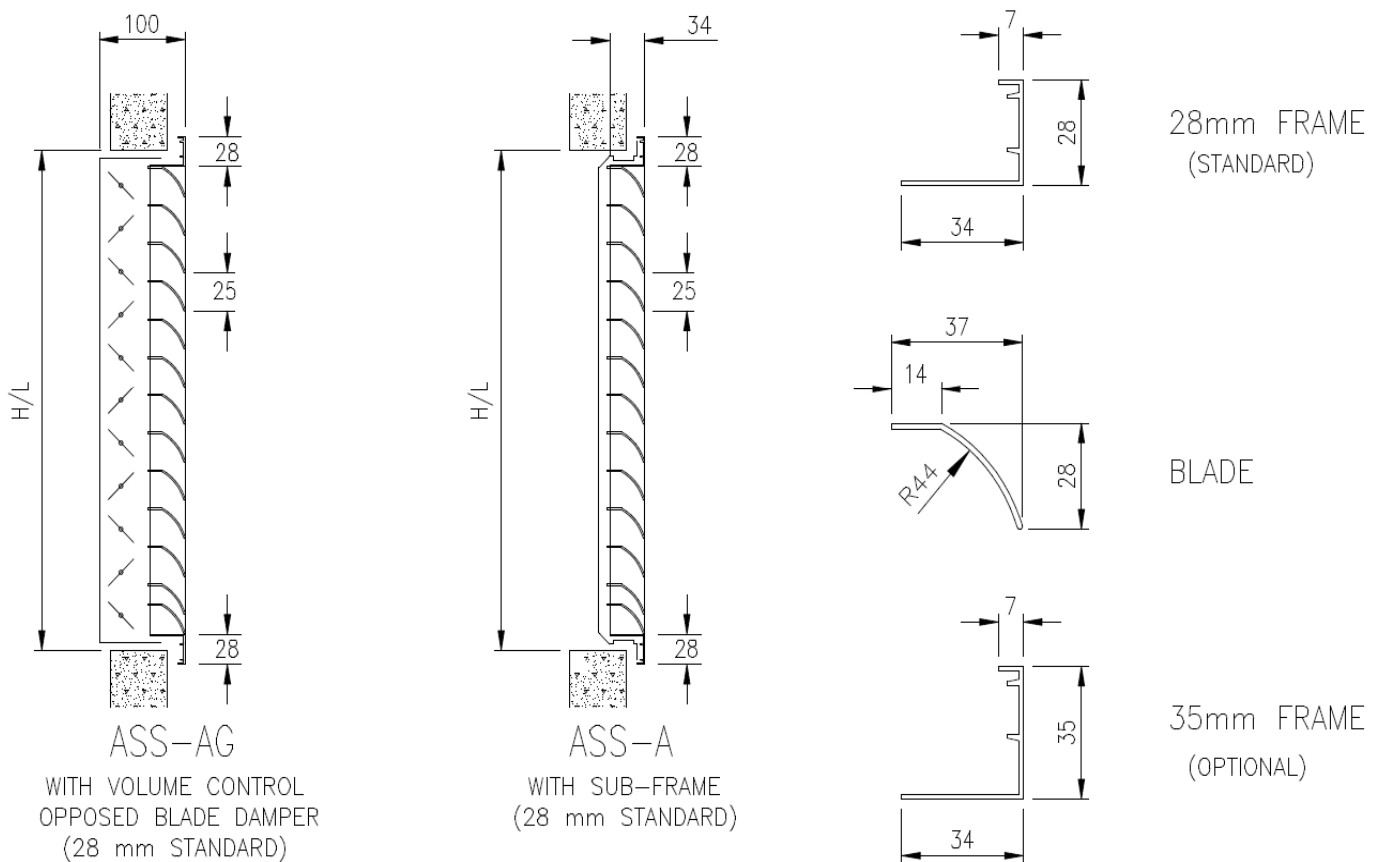

Technical Data & Order Code

ASS : Technical Performance Data							
H in mm		Pressure Drop (Pa)					
		<10	<10	12	20	28	38
150	Volume (l/s/m)	60	90	120	150	180	210
	Throw (m)	3	4	6	7	8	9
200	Volume (l/s/m)	90	135	180	225	270	-
	Throw (m)	4	5	7	8	10	-
250	Volume (l/s/m)	120	180	240	300	-	-
	Throw (m)	4	6	8	9	-	-
300	Volume (l/s/m)	150	225	300	-	-	-
	Throw (m)	4	6	8	-	-	-
350	Volume (l/s/m)	180	270	360	-	-	-
	Throw (m)	5	7	9	-	-	-
400	Volume (l/s/m)	210	315	-	-	-	-
	Throw (m)	5	8	-	-	-	-
450	Volume (l/s/m)	240	360	-	-	-	-
	Throw (m)	6	8	-	-	-	-

Order Code for ASS Grille

ASS - A or ASS - AG / 200 X 200 / OP / 28 / 0 / P0 / VEP1595

A - No OBD
AG - With OBD

Size - width x height

20mm -
28mm - Standard
35mm

OP - Opening
ON - Neck
OF - Over Flange

State Colour

0 - Natural Anodised
P0 - Standard White VEP1595
P0 - Standard White RAL9010
P1- Powder Coated to RAL...

0 - Punched and Countersunk
1 - Unpunched no concealed fastner
2 - Unpunched with concealed fastner
3 - Unpunched with concealed fastner and subframe

Order Example

Make: TROX
Type: ASS - A / 200 X 200 / OP / 28 / 0 / P0 / RAL9010