


Flat Panel Filter

Primary Filter

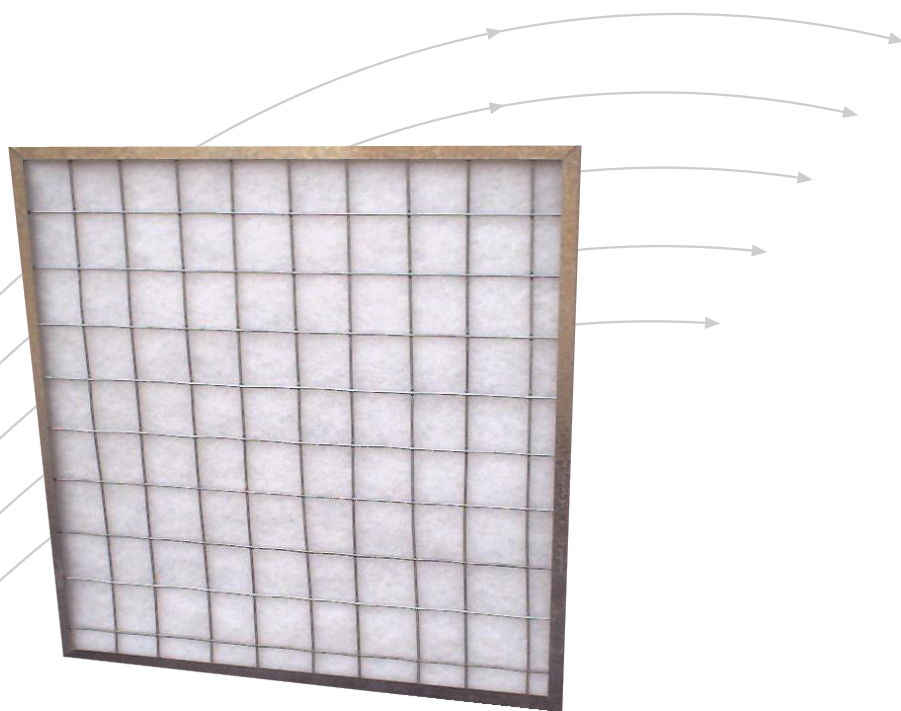

TROX[®] TECHNIK

TROX (South Africa) (Pty) Ltd.
10 Wigford Road
Masons Mill
Pietermaritzburg

Tel. +27 (0)33 398 1006
Fax. +27 (0)33 398 1100
email : pmb@troxsa.co.za
Website: www.troxsa.co.za



Description

The media pads in a support frame are for general use in HVAC systems or Air Handling Units. They provide an alternative to the pleated filters.


These primary lightweight panel filters are available as washable or disposable types when using media F711 or 4/20. When using the media F702, the filters are disposable only.

These filters are comprised of high quality synthetic/glass media, which is housed in a galvanised frame.

FRAME	
Material	Depth (mm)
Galv	20
Galv	25
Galv	50

MEDIA Material	Depth (mm)
F702	50
F711	20/25
4/20	20/25

Order Code

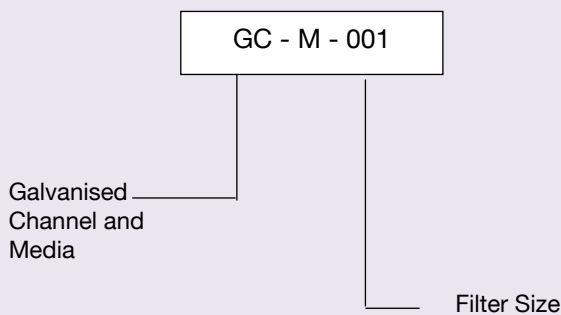

4/20/711	
Vol m ³ /h @ 60Pa	Filter Size (mm)
760	295 x 595
840	395 x 495
1060	395 x 625
1060	495 x 495
1275	495 x 595
1330	495 x 625
1530	595 x 595

F702	
Vol m ³ /h @ 60Pa	Filter Size (mm)
1230	295 x 295
2470	295 x 595
2750	395 x 495
3440	395 x 625
3440	495 x 495
4140	495 x 595
4320	495 x 625
4980	595 x 595

Rated Airflow @ 60Pa for:

4/20/711 20-25mm = 4253 m³/h/m²

702 50mm = 13844 m³/h/m²

Order Example :

Make: TROX
Type: GC-M-001/ 295 x 595 x 25

